


LARGE SCALE FLOW MEASUREMENT SOLUTIONS

Highest accuracy data
for the complete water cycle



Innovative solutions
for valuable resources

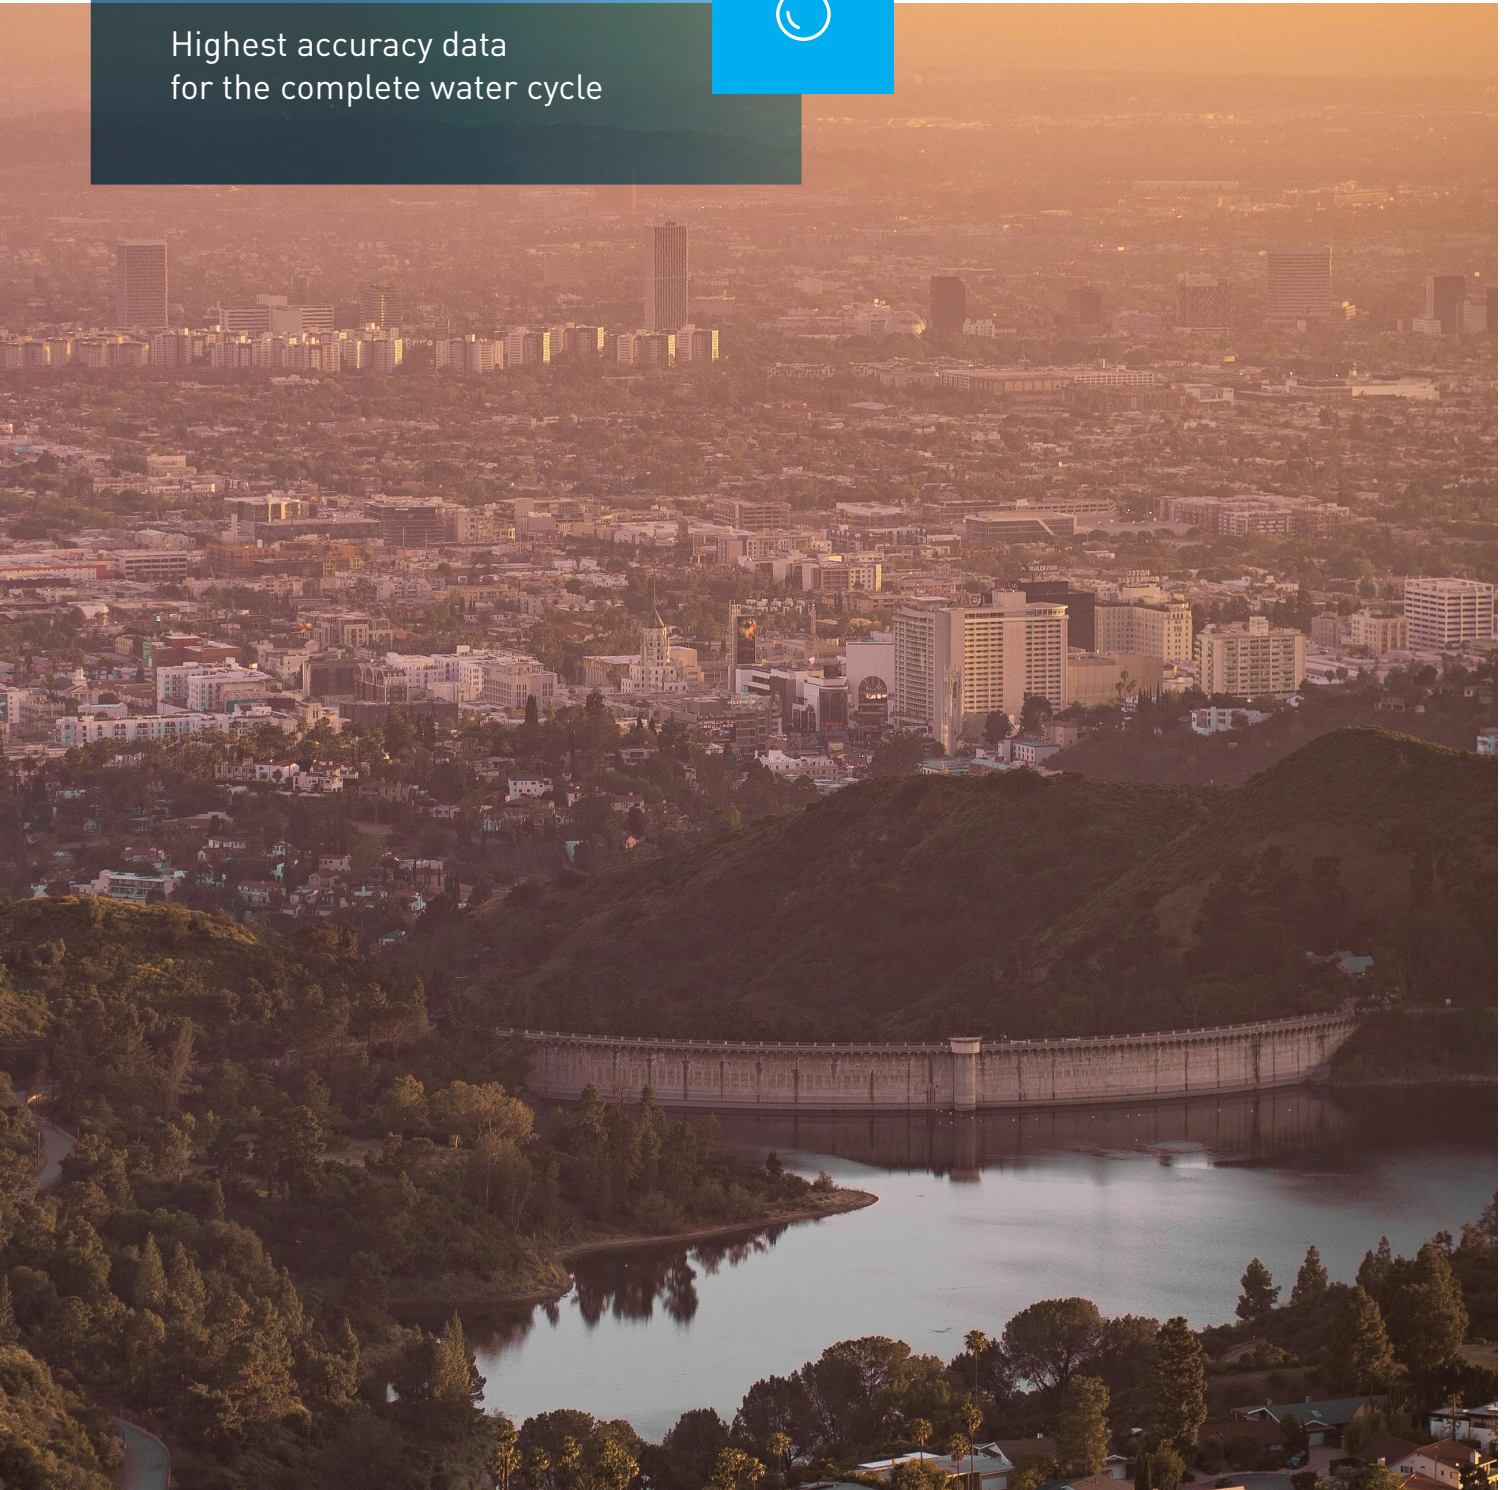

The most advanced, flexible, and efficient measurement system you can buy

GWF measures water and wastewater in all forms and applications in the water cycle. Raw water, drinking water, pure and ultrapure water, rainwater, effluent and wastewater in fully filled pipes, partially filled pipes, channels, or rivers: GWF can provide tailored solutions with flow ranges of up to 10,000:1, with accuracies as low as +/-0.15%, and velocity measurements down to 0.1ft/s even in pipes and water tunnels as large as 50ft in diameter and open channels up to 3300ft (1000m) wide.

GWF tailors the measurement solution to your needs. Most critical measurement points are truly unique. Also, the selection of the right technology and performance depends on your requirements. Be it a retrofit or new-build installation: GWF first analyzes the situation together with you based on a detailed approach to ensure top measurement quality for your specific needs.

GWF measurement solutions provide best total cost of ownership. Investing and operating high-quality measurement devices can be expensive. This is why GWF uses technology that is self-verifying and maintenance free. The measurement devices are in-field upgradeable and remote service packages are available for your convenience.

“GWF’s innovative acoustic flow measurement technology sets a new standard in accuracy and reliability to generate high-precision data for water and waste water flows.”

James Rees,
Water Expert, Houston (TX)

A unique line-up of technologies and products

Ductus – for for pressurized pipe applications


Extreme low flow measurement accuracy in combination with industry leading dynamic range, can maximize flow capture. Your **large diameter flow** measurement and custody transfer billing will become much more reliable. In **wastewater** treatment plants, Ductus will help you to capture low velocities and will optimize your management of capacity needs, biological processes and sludge returns. In Hydropower applications, Ductus is used to implement turbine efficiency monitoring

Kanalis – for channels, tunnels, and rivers

Highest accuracy for changing flow conditions in combination with a proven, rugged design, allows you to accurately measure your **raw-water intakes, stormwater tunnels, combined sewer overflows, process water returns, and irrigation canals.** Kanalis provides you with granular data to manage and optimize your processes leading to better efficiency and oversight – and to adhere to regulatory reporting requirements.


Tailored solutions for your specific needs

GWF pride themselves in addressing applications that some consider are too hard. We have developed numerous tailored solutions for existing infrastructure to **avoid costly reconstruction.** We define performance characteristics together with you and provide you with your **tailored solution proposal.**

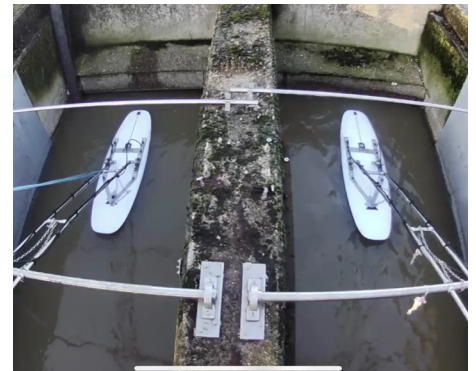

Case studies

GWF's measurement devices are installed around the globe. Our network of branch offices and qualified partners allows us to efficiently execute your project. Below, you can find a few impact case studies, where GWF products and solutions provide highest accuracy data in challenging measurement conditions.

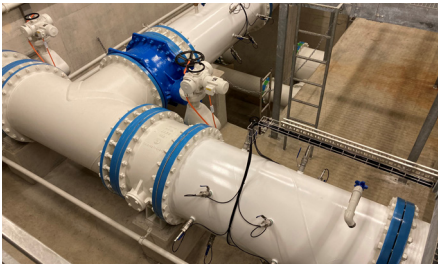


Water supply: Highest accuracy low flow detection in two directions

Measuring the reservoir outflow in this case is particularly challenging: The reason for this is the highly fluctuating flow situation. In special operational situations, backflows into the reservoir can occur, resulting in zero flow passages. Therefore, the measurement system must be capable of accurately detecting even the smallest quantities in both directions. GWF's Ductus was installed and provides highest accuracy data since 2019.



Hydropower: Assessing turbine efficiency at highest precision

In collaboration with the turbine manufacturer, GWF delivered a high-precision Ductus system to monitor the turbine efficiency and implement a performance contract. The accuracy level of measurement is +/- 0.15% ensuring the ability to perform predictive maintenance. GWF has various systems and approaches to work with Hydropower plant managers and turbine manufacturers to ensure highest efficiency of the costly infrastructure.

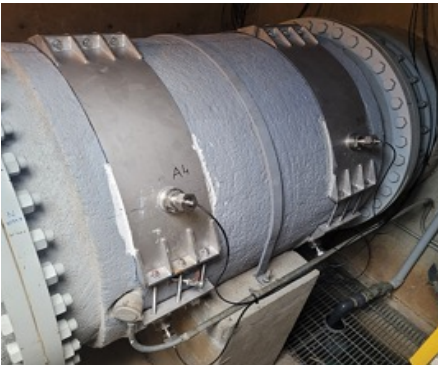


Wastewater: In-field upgrade with ultrasonic measurement technology

The installed electromagnetic insertion flowmeter was removed due to erratic behavior, and an acoustic profiler meter does not provide reliable data (6% of recorded values are zeros or negative values). GWF installed a multipath Ductus with feed-through sensors and was able to avoid costly infrastructure investments with its in-situ installation. The device is providing highest accuracy flow data despite the challenging applications: The 48-inch diameter interceptor passes through a flow meter vault, a 9-foot vertical 90-degree bend, a vertical 14-foot riser section and then discharges into the WWTP. Summer nighttime flows can be less than 1 MGD. Approx. 89% of the flows have velocities less than 1 fps.



Stormwater: Measuring a 30-foot water tunnel

Heavy weather events can bring existing water treatment infrastructure to its limits. An increasing number of cities build stormwater infrastructure and GWF supports these projects with highest accuracy measurement devices. In this example, we installed Ductus in a 30-foot tunnel as integral part of the infrastructure project. The generated data is used to remain an oversight on water storage capacity and support the gradual disposal of stormwater to the treatment plant.

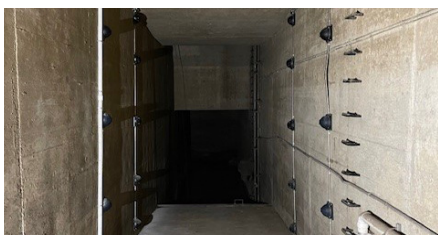

Rainwater: Measuring inflow in rainwater retention basin

The square shaped inflow tunnel in the rainwater retention basin was challenging to measure. However, with GWFs Ball Mount Transducers, the task became easy. GWF delivered the full solution including turnkey installation with a multipath Kanalis system.

GWF AFM PRODUCTS

Areas of Application

 HYDROPOWER	 HYDROLOGY	 WASTEWATER	 IRRIGATION	 WATER SUPPLY
<p>Ductus (12 in to 49 ft) Kanalıs (3 ft to 300 ft)</p>	<p>Fluvıus (300 ft to 3000 ft) Kanalıs (3 ft to 300 ft)</p>	<p>Ductus (12 in to 49 ft) Kanalıs (3 ft to 300 ft) Q-Eye PSC / Radar (4 in to 30 ft)</p>	<p>Kanalıs (3 ft to 300 ft) Q-Eye PSC / Radar (4 in to 30 ft) Sonıco EDGE (2 in to 12 in)</p>	<p>Ductus (12 in to 49 ft) Sonıco EDGE (2 in to 12 in)</p>
<p>Stationary multipath flow meter for penstocks to determine the efficiency of a turbine, pipe burst and leakage monitoring, process control, digital power plant</p>	<p>Stationary multipath flow meters for rivers, waterways and natural channels to measure floods (forecast), low-water situations, to control cooling water extractions and ecological min. flow</p>	<p>Stationary and portable flow meter to measure the inflow and/ or the outflow of wastewater treatment plants, sewer network monitoring, infiltration studies in sewer systems (groundwater)</p>	<p>Stationary multipath flow meter to measure the flow in irrigation networks, farmers outlets, gate control, billing on demand</p>	<p>Stationary multipath flow meters to measure the flow in pressurized pipes with high accuracy, independent of bends, valves or pumps. Process control (SCADA). Insertion type and spool pieces</p>
				

GWF: Your trusted partner since 1899

GWF looks back at a rich 125-year history providing leading utilities worldwide with innovative and robust solutions for flow measurement. Headquartered in Lucerne, Switzerland, GWF stands for highest quality measurement devices, communication and data collection modules, and data platforms. The family owned business operates out of nine offices in Europe and the USA and works with partners and distributors across the globe to solve water and wastewater challenges.



Ask our experts

Our experts have decades of experience in the water sector and are more than happy to talk with you about our innovative solutions for your water network. We frequently host water network related events and virtual meetings – please reach out for more details.



Alex Watson
Managing Director GWF USA Inc
alex.watson@gwf-group.com
+1 352 286 1564



Dr. Jürgen Skripalle
Senior Application Expert
juergen.skripalle@gwf-technologies.de
+49 8341 95999 0



Sergio Thaddey
Product Manager GWF Water Products
sergio.thaddey@gwf.ch
+41 41 319 51 85